

◆ **Technical Data:**

**Model:PR-24DC-DAI-RTA**



**GENERAL SPECIFICATIONS**

Timers : 1024

Counters : 1024

Function Blocks: 1024

Operation temp.: -20°C-55°C

Storage:-40°C-70°C

Protection: IP20(Non-waterproof)

RTC accuracy : MAX ±2S/day

RTC Backup at 25 °C: 20 days

Program and settings Backup :10 years

Data Power-off retentivity: 10 years

Modify parameters via keypad LCD: yes

Dimensions: 133\*90\*61 (Unit: mm)

Certificate: CE


Installation: 35-DIN rail or screw for installation

Expansion capacity: 16 modules (PR-E-16)

Password protection : 4-digit number password protection or disable program upload function

Communication interface : 1 RS232 port & 2 RS485 port

Communication protocol : Modbus RTU/ASCII

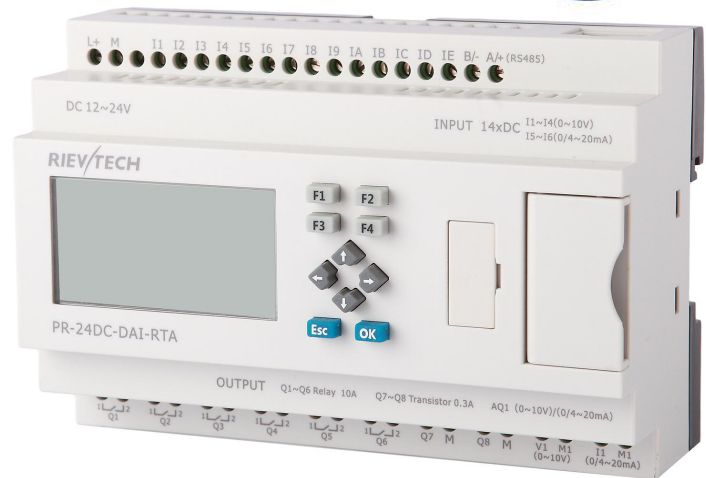




**Technical Index**

<b>Power supply:</b>	
Nominal voltage	DC 12-24V
Operating limits	DC 10.8-28.8V
Immunity from micro power cuts	Typ.5 ms
Max. Startup current	Max. 0.25A
Max. absorbed power	3.5 W (10.8V dc) ; 4 W (28.8V dc)
Protection against polarity inversions	Yes
<b>Input parameters:</b>	
Input No	14 ( I1-IE)
Digital input	12 (( I1-I4 )(I7-IE)
Analogue input	4 ( I1-I4)(0..10V DC) +2(I5-I6)(0...20mA)
<b>Digital inputs( I7-IE )</b>	
Input voltage	DC0-28.8V
Input signal0	< 5V DC; <1mA
Input signal1	> 8 V DC;>1.7mA
Input current	2.3mA @ 10.8V dc 2.6mA @ 12.0 V dc 5.2 mA @ 24 V dc 6.3 mA @ 28.8 V dc
Response time	0 to 1 : <1 ms ; 1 to 0 : <1 ms
Maximum counting frequency	60k Hz(I9--IC)

Sensor type	Contact or 3-wire PNP
Input type	Resistive
Isolation between power supply and inputs	None
Isolation between inputs	None
<b>Inputs used as digital inputs( I1-I4 )</b>	
Input voltage	DC0-28.8V
Input signal0	< 5V DC;<0.1mA
Input signal1	> 8 V DC;>0.3mA
Input current	0.4mA @ 10.8V dc 0.5mA @ 12.0 V dc 1.2mA @ 24 V dc 1.5mA @ 28.8 V dc
Response time	0 to 1 : Typ. 1.5 ms ; 1 to 0 : Typ. 1.5 ms
Maximum counting frequency	Typ.: 4 HZ
Sensor type	Contact or 3-wire PNP
Input type	Resistive
Isolation between power supply and inputs	None
Isolation between inputs	None
<b>Inputs used as analog inputs( I1-I4 )</b>	
Measurement range	DC 0---10V
Input impedance	Min, 24K $\Omega$ ; Max. 72K $\Omega$
Input voltage	28.8 V DC max
Resolution	10bit ,0.01V
Accuracy at 25 °C	$\pm$ (Max.0.02)V
Accuracy at 55 °C	$\pm$ (Max.0.04)V
Isolation between analog channel and power supply	None
Cable length	10 m max. shielded and twisted
<b>Current Input parameters(I5-I6)</b>	
Input No	2(I5-I6)
Digital input	None
Analogue input	2 (I5-I6)
Analogue signal	0/4....20mA current
Resolution	0.02mA
Accuracy at 25 °C	0.05mA
Cycle time for analog value generation	Typ. 50 ms
<b>Output parameters:</b>	
Output No.	(Q1-Q8,AQ1)
Output type	Q1-Q6(Relay)+ Q7-Q8(Transistor),AQ1(0-10V)/(0/4-20mA) output
<b>Relay output(Q1-Q6)</b>	
Continuous current	Resistive load 10A/Inductive load 2A
Max. breaking voltage	AC 250 V DC 110 V
Max. Allowable Power Force	1250VA 300W
Electrical durability Expectancy	10 <sup>5</sup> Operations at Rated Resistive Load
Mechanical life	10 <sup>7</sup> Operations at No Load condition

Response time	Operate Time : 15 mSec. Max. Release Time : 10 mSec. Max.
Built-in protections	Against short-circuits: None Against overvoltages and overloads: None
<b>Transistor output(Q7-Q8)</b>	
Output No.	2(Q7-Q8)
Output type	Transistor(PNP)
Breaking voltage	DC 5--30V
Nominal voltage	≤ Supply voltage
Nominal current	Max. 0.3 A per channel
Max. breaking current	0.65 A
Voltage drop	< 2 V for I = 0.3 A (at state 1)
Response time	Make ≤ 1 ms Release ≤ 1 ms
Frequency (Hz)	resistive load : 10 Hz inductive load : 0.5 Hz
Built-in protections	Against overloads and short-circuits: No Against overvoltages (*): No
Galvanic isolation	None
PWM frequency	10K HZ
PWM cyclic ratio	0 to 100 %
PWM accuracy at 120Hz	< 0.5 % (20 % → 80 %) load at 10 mA
Max. Breaking current PWM	50 mA
Max. cable length PWM	20m
<b>Analog output(0...10V):</b>	
Output No	1 AQ1
Output signal	DC 0...10V
Internal value and signal relationship	AQ1(0..1000)= V1(0...10V)
Resolution	0.01V
Accuracy at 25 °C	0.02V
<b>Analog output(0...20mA):</b>	
Output No	1 AQ1
Output signal	0..20mA
Internal value and signal relationship	AQ1(0...1000)= I1(0...20mA)
Resolution	0.02mA
Accuracy at 25 °C	0.05mA
<b>Relay Switch frequency:</b>	
Mechanism	10Hz
Resistor/light load	2Hz
Sensitive load	0.5Hz
<b>Other parameters:</b>	
Weight	Approx.500g

# Installation Dimensions & Wiring Diagram

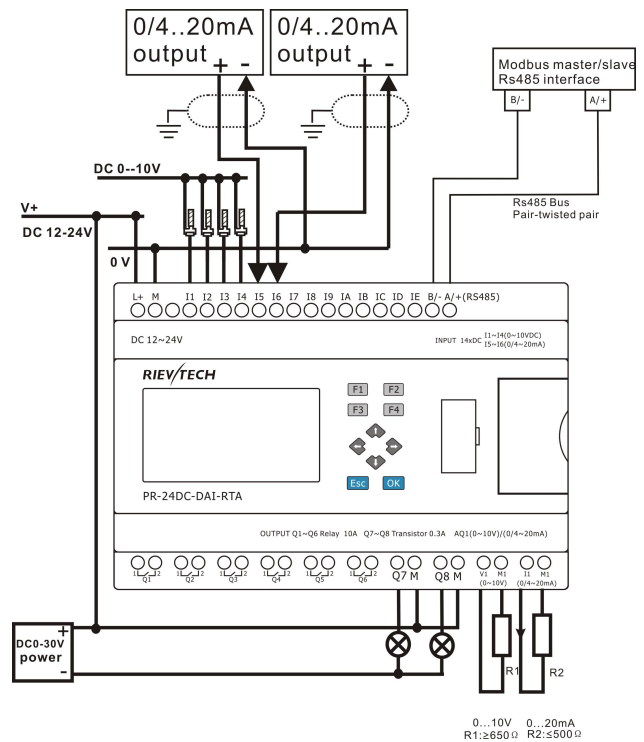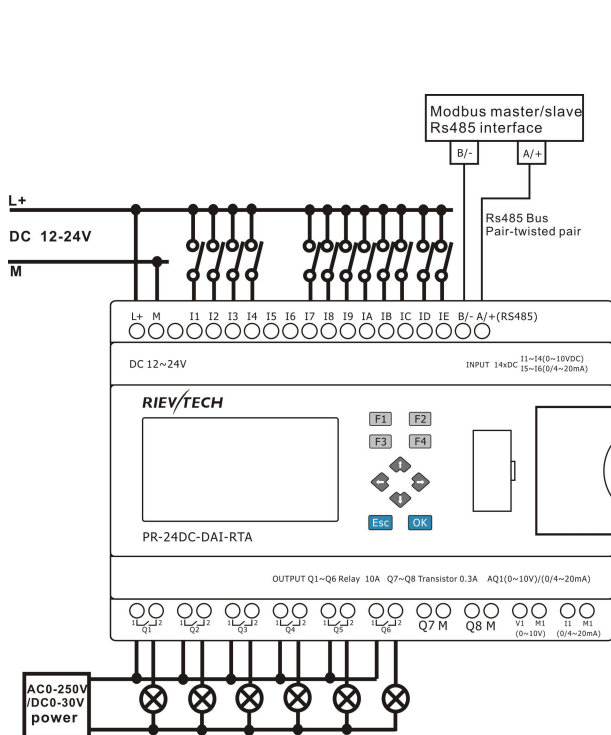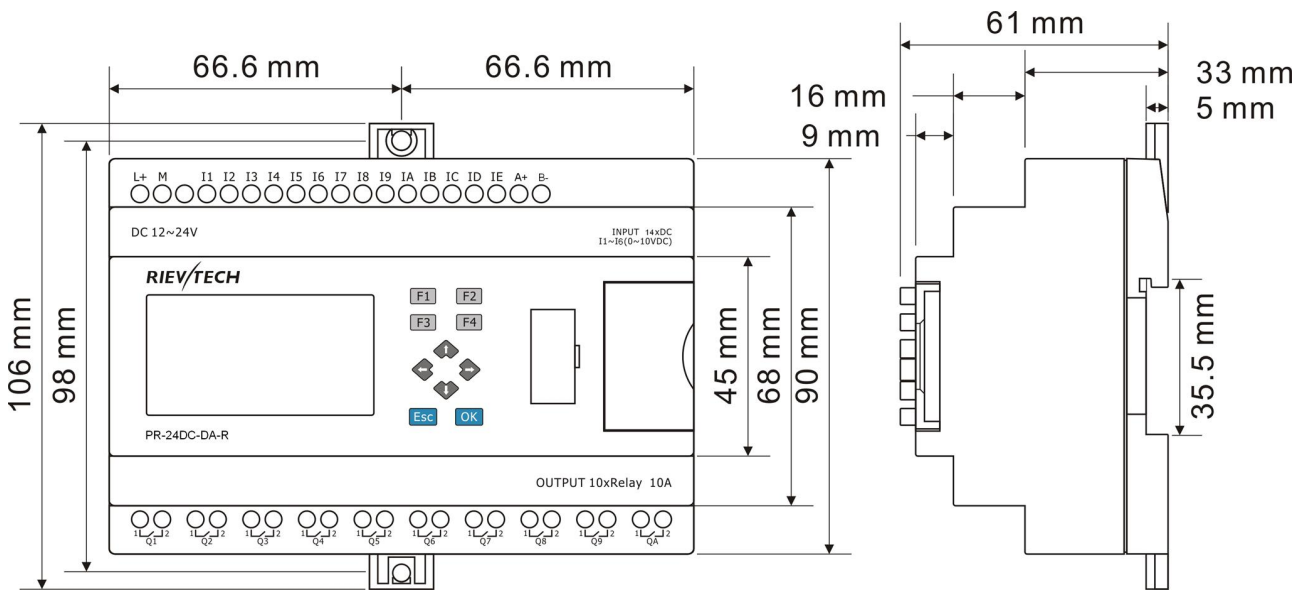

SYSTEM						
SYSTEM		Operating System requirements		Windows /2000/XP/WIN7/WIN8		
SYSTEM		Programming languages		Function block		
SYSTEM		Program Memory		1024		
SYSTEM		Execution Speed		<0.1ms per function		
SYSTEM		LCD Display		4 lines x 16 characters		
SYSTEM		Functions		Up to 70 function blocks		
BASIC	Timers					a.On-delay;
	Maximum Number	1024				b.Off-delay etc.
	Timing Ranges	10ms--99 h59m			Up to 12 kind Timers	
	Counters					a.Up/down Counter
	Maximum Number	1024				b.Hours Counter
	Highest Count	99999999				c.Frequency Threshold
	Resolution	1			Trigger	
	RTC					a.Weekly Timer
	Number available	1024				b.Yearly Timer
	Resolution	1 min				
	Time span available	Week/year-month-day-hour-min				
	Flags					a.Digital Flag
	Digital flags	256				b.Analog Flag
	Analog flags	256				
	PI Functions					a.PI Controller
	Number available	30				
	Parameter Ranges	1-32767				
	Analog Math					a.Analog Math
	Number available	1024				b.Analog Math
	Function	ADD, Subtract,Multiply, Divide			Error detection	
Analog Ramp Function					a. Analog Ramp	
Number available	55					
Compare Function					a.Analog compactor	
Number available	1024				b.Comparison of 2 values	
Special Functions	HMI Screens					a.Message texts
	Number available	128				
	Display/Edit	Preset Current value and Free text				
	PWM Functions					a.PWM
	Number available	1024, (2 fast output for Transistor)				
	Communication Functions					a.Modbus write
	Number available	1024(Only CPU works as Master need these 2 blocks, slave does not need)				b.Modbus read
	Word/bit data Conversion	Square Boot	Sin/Cos	RS latch relay		
	Data-logger Function	Analog watchdog	Analog filter	Average value		
	Pumps Management	Defrost function	Multiplexer	Pulse Relay		
Cam Control	Astronomical clock	Stop watch	Boolean function			
<p>Note: 1.Not all program functions are listed in this table i.e. AND,NAND,OR,NOT,NOR,XOR,SHIFT REGISTER,DATA LATCHING RELAY, COMPORT STATUS etc.</p>						